


Mechanical Drawing

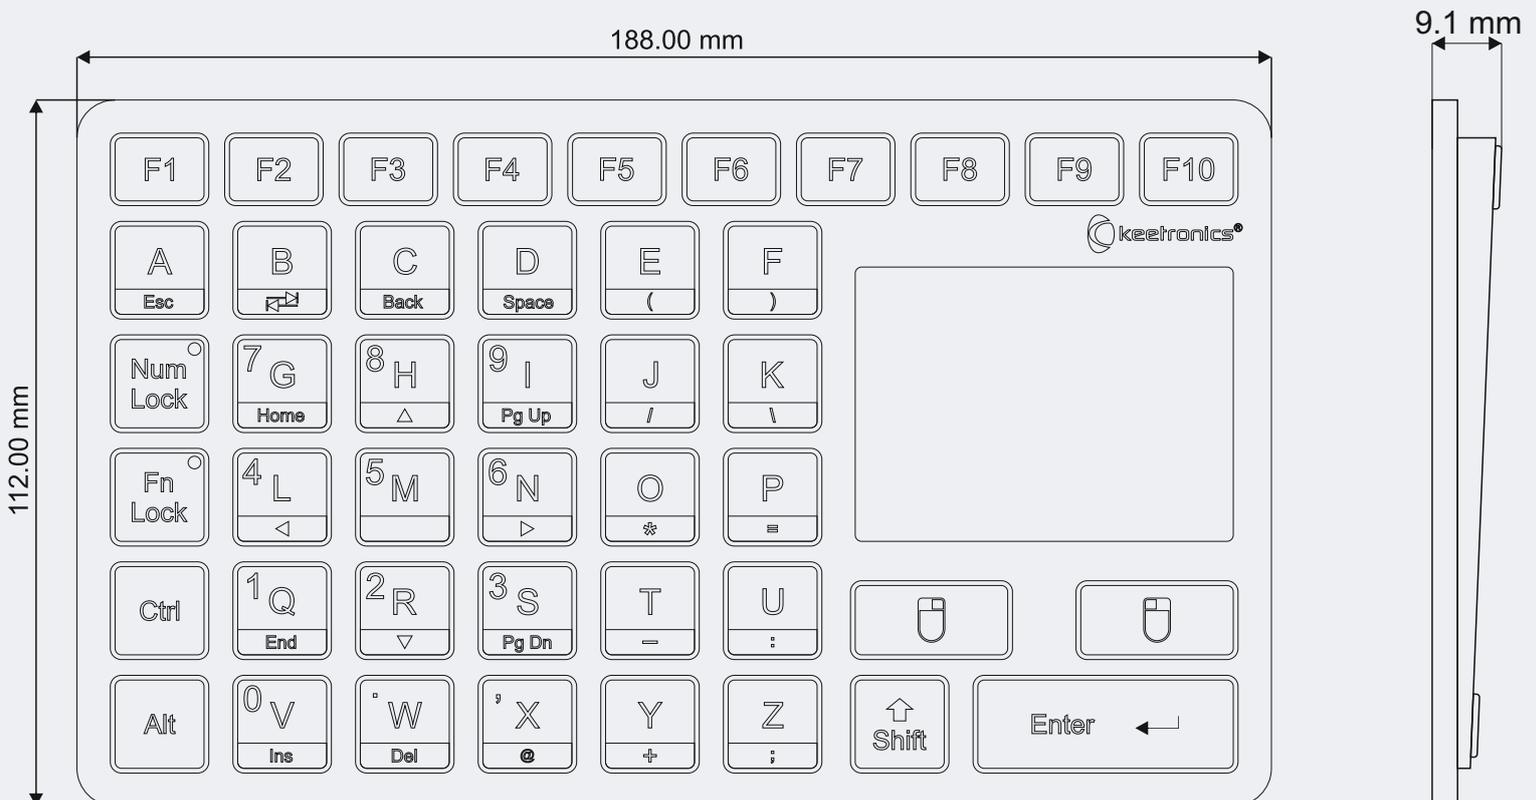

-Key Functions

Condition : NumLock/FnLock(OFF)	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6
Row 1	A	B	C	D	E	F
Row 2	Num Lk	G	H	I	J	K
Row 3	Shift	l	M	N	O	P
Row 4	Ctrl	Q	R	S	T	U
Row 5	Alt	V	W	X	Y	Z
Condition : NumLock(ON)	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6
Row 1	A	B	C	D	E	F
Row 2	Num Lk	7	8	9	J	K
Row 3	Shift	4	5	6	O	P
Row 4	Ctrl	1	2	3	T	U
Row 5	Alt	0	.	,	Y	Z
Condition : FnLock(ON)	Col 1	Col 2	Col 3	Col 4	Col 5	Col 6
Row 1	Esc	Tab	Backspace	Spacebar	()
Row 2	Num Lk	Home	Up	Pg Up	/	\
Row 3	Shift	Left		Right	*	=
Row 4	Ctrl	End	Down	Pg Dn	-	:
Row 5	Alt	Ins	Del	@	+	;
All functions keys are individual.						

-Technical Specification

• Electrical:

- Power Supply:
 - USB: +5V/DC
- Current Input:
 - USB: 50mA
- Interface: USB
Compatible with all Microsoft Windows / MAC / Linux
- USB Cable Length : Approx. 1.8Meter

• Others:

- Operating temperature: -30°C to +70°C
- Storage temperature: -40°C to +75°C
- Operating humidity: 90-95% Resistant
- Dimensions (L-W-T): 188.0mm x 112.0mm x 9.1mm(Excluding key height) Tol. ±0.5mm
- IP 68 Compatible
- Warranty: 1 Year

• USB Pinout Table

USB	
PIN	Definition
1	VDD/5V
2	D-
3	D+
4	GND

• Mechanical:

- Number of Keys: 30keys + 10 Function Keys + 2 Mouse
- Individual key life cycle: 1 million key strokes
- Key actuation force: 200g ±30g
- Key travel: 1.5mm ±0.2mm
- Key Switch Material: Gold Plated Metal Dome
Industrial Silicone Rubber